
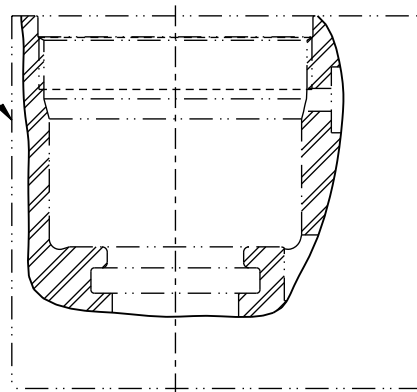
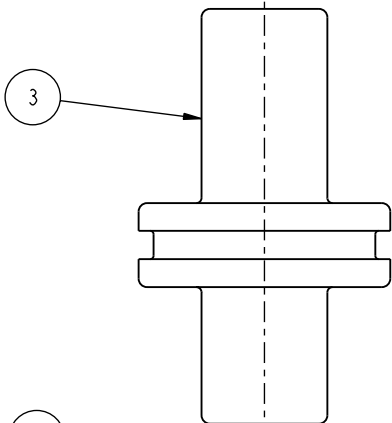


Lubricate all seals with clean hydraulic oil prior to assembly.
DO NOT USE SILICONE BASED LUBRICANTS

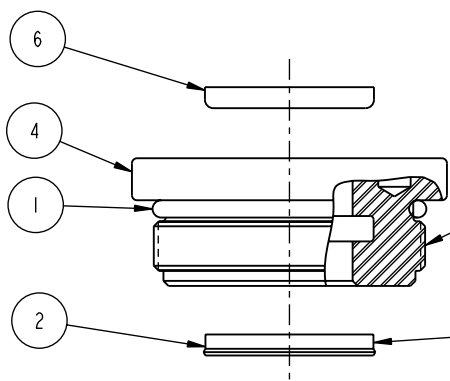

Standard Seal Kit 60-2022-15	Fluorocarbon Seal Kit 6V-2022-15
39-0100-21(2)	39-V100-21(2)
39-H110-31	39-V110-31
39-0010-14	39-V010-14
39-V100-22	39-V100-22

No.	QTY	PART No.	DESCRIPTION
6	1	39V10022	WIPER,PRESS-IN,3/4", 85 FKM
5	1	39H11031	SEAL,T,1 5/16X5/32X1 1/2,70 HNBR
4	1	82031503	GLAND, CYL, HR, 6600&29.7KN, DA
3	1	82011503	PISTON, CYL, HR, 6600
2	2	39010021	SEAL, LOADED LIP, 94 AU
1	1	39001014	O-RING, (-127),1.424x.103,70 AU

PARTS LIST



K	2470	RELEASE	JDW	11/14/12
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE
DRW BY:	VANDALSEM	DRAWING STATUS: Released		
DATE:	04/07/87	PRODUCTION APPROVED FOR RELEASED STATUS ONLY		

ASSEMBLIES AFFECTED
20-2215-04
20-2215-04F

PARTS LIST, ASSY, CYL, HR, 6600, DA	
SIZE A	PL2033
REV K	