


Handle here in position B
P to B
A to T

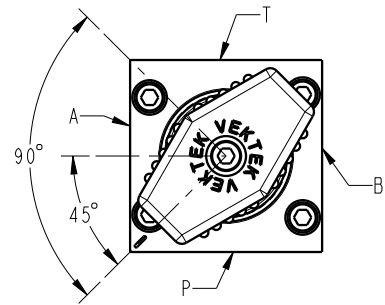

Center Position
A and B dump
to tank

Handle here in position A
P to A
B to T

To Reposition Handle:

1. Remove center screw
2. Take off and reposition handle
3. Apply low strength loctite to center screw
4. Torque center screw to 20 in-lbs

P-Blocked Center Valve to be used with
double acting systems using a pallet decoupler

**INSTALLATION
INSTRUCTIONS**



VEKTEK, INC.
1334 E. SIXTH AVE. P.O. BOX 625
EMPORIA, KS. 66801 U.S.A.

A	3892	RELEASE	ALS	08/08/19
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE
DRW BY:	ALS	DRAWING STATUS: Released		
DATE:	08/08/19	PRODUCTION APPROVED FOR RELEASED STATUS ONLY		

ASSEMBLIES AFFECTED
71-1474-02
43-1147-41

INSTRUCTION SHEET, VALVE, MANIFOLD, 3/4, PBC		
SIZE A	1S7122	REV A