


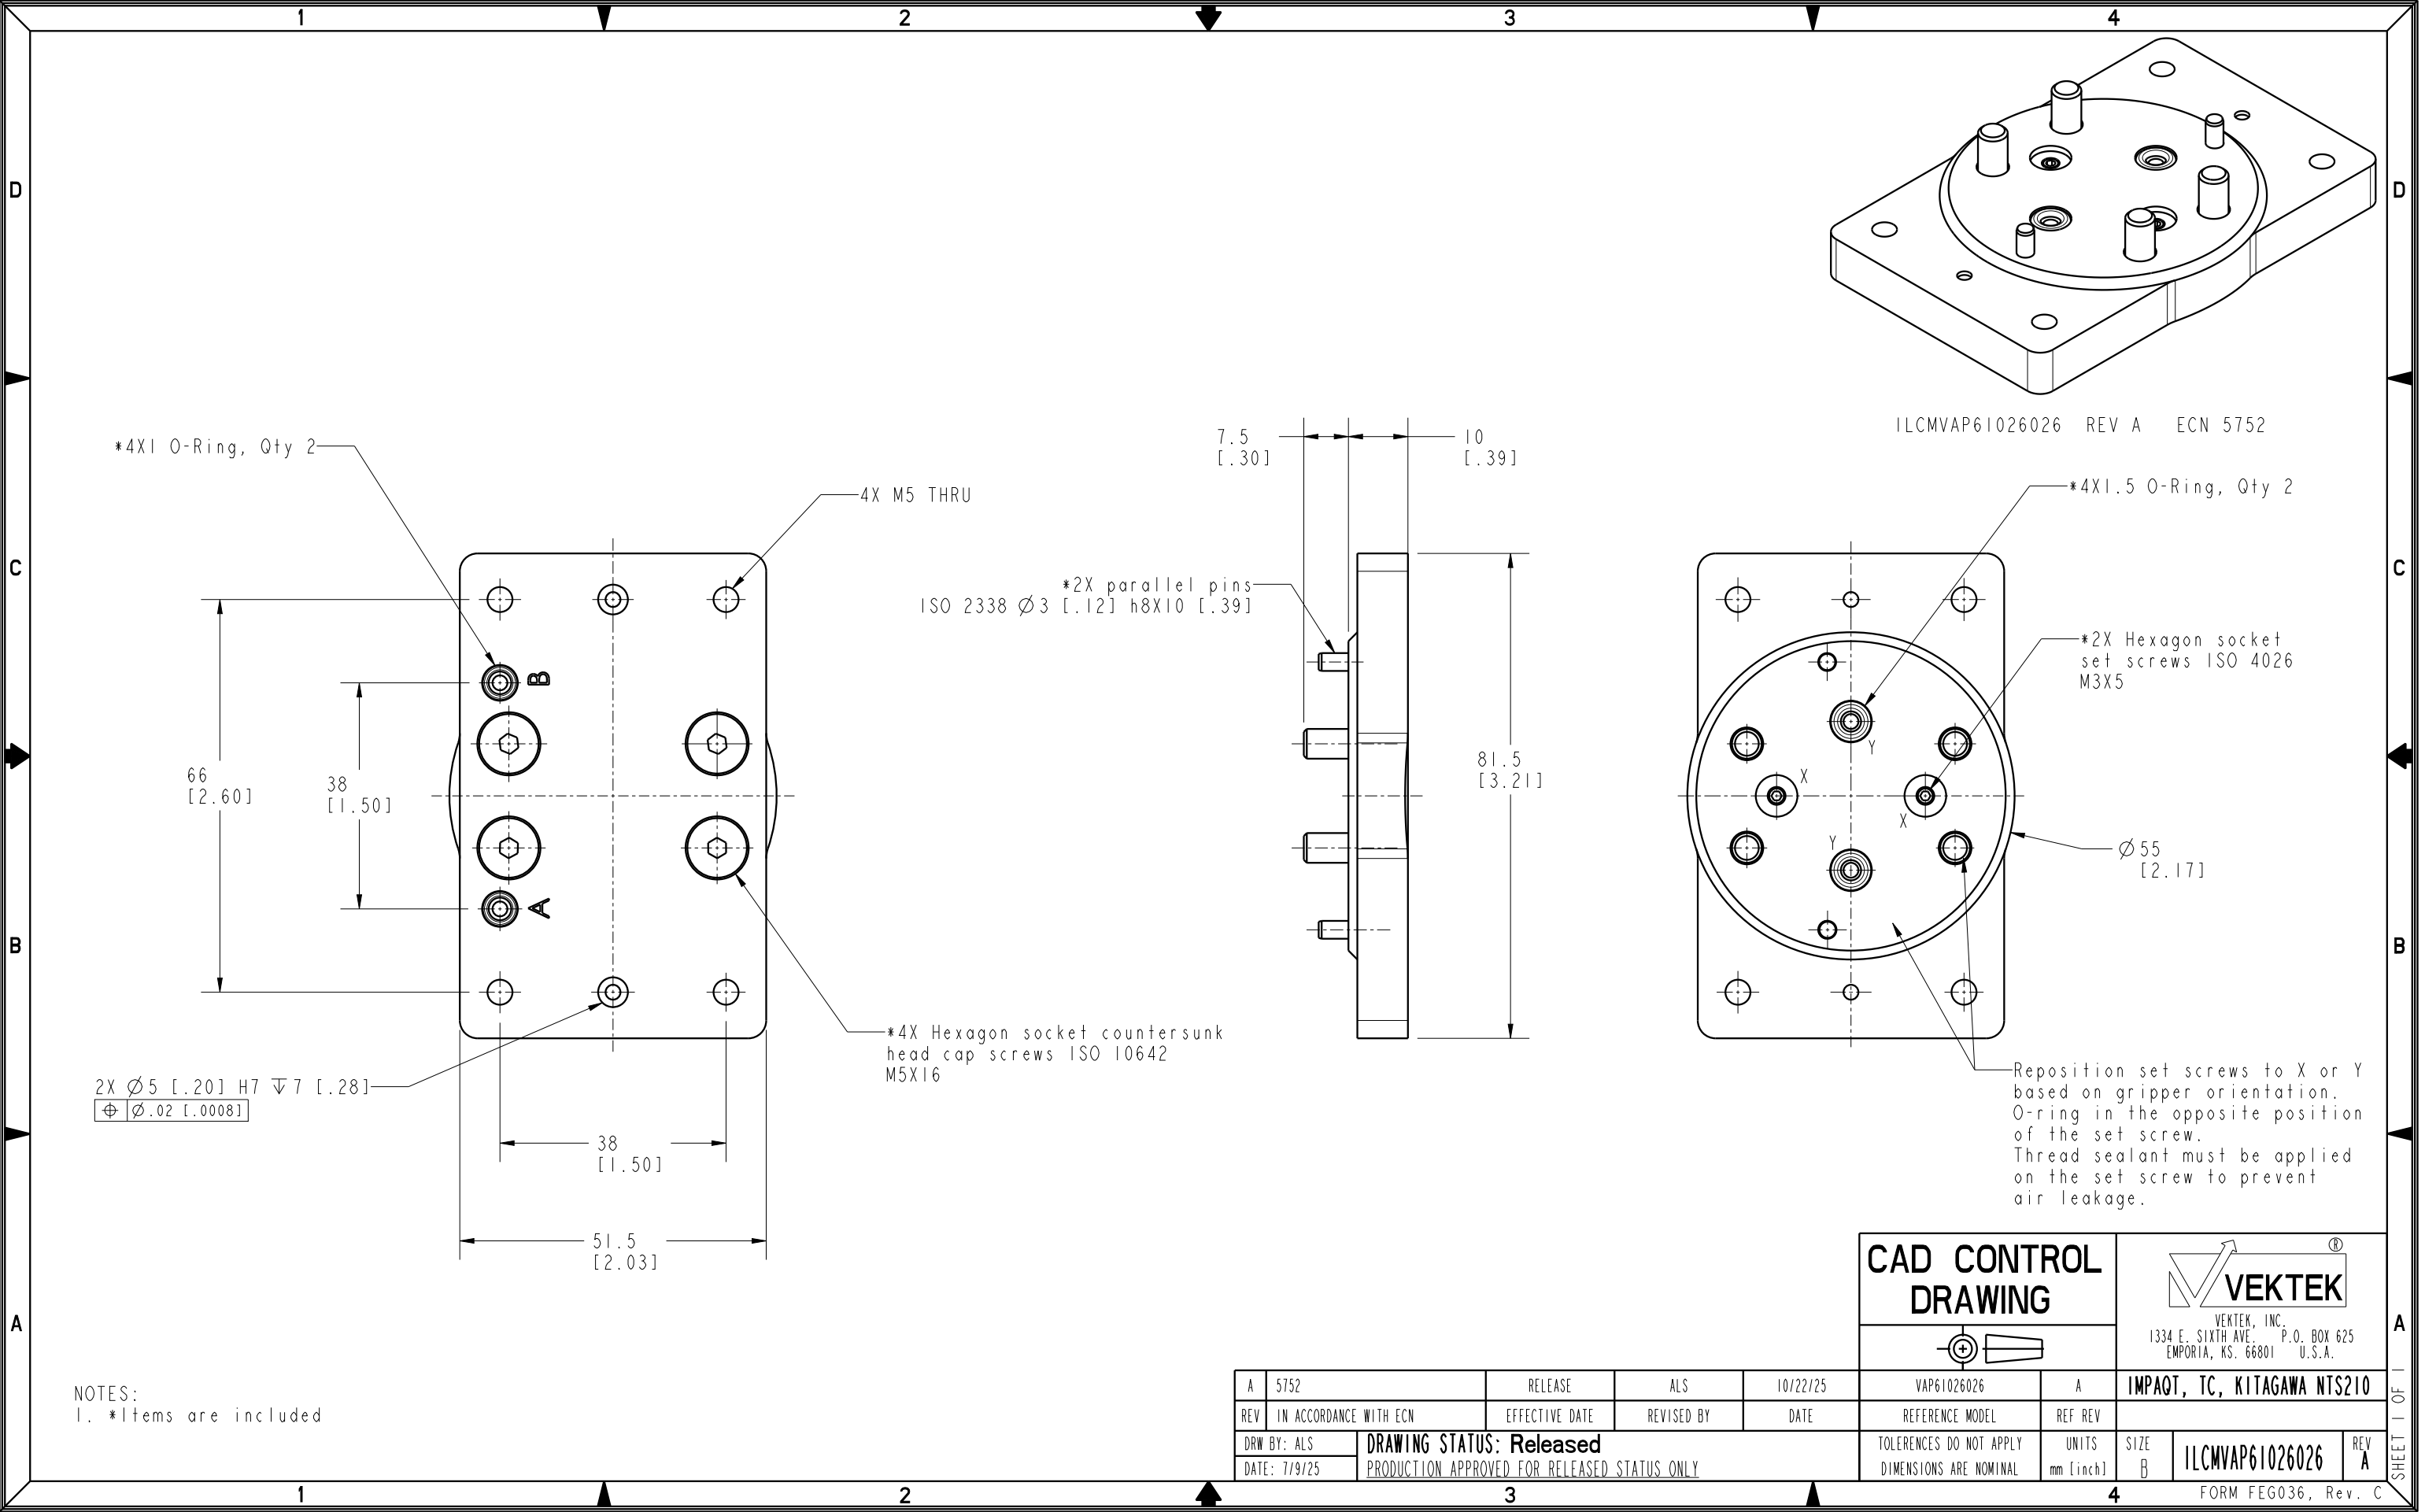

I LCMVAP61026026 REV A ECN 5752

Reposition set screws to X or Y based on gripper orientation. O-ring in the opposite position of the set screw. Thread sealant must be applied on the set screw to prevent air leakage.

CAD CONTROL DRAWING				 VEKTEK, INC. 1334 E. SIXTH AVE. P.O. BOX 625 EMPORIA, KS. 66801 U.S.A.			
				IMPACT, TC, KITAGAWA NTS210			
A	5752	RELEASE	ALS	10/22/25	VAP61026026	A	IMPACT, TC, KITAGAWA NTS210
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE	REFERENCE MODEL	REF REV	
DRW BY: ALS	DRAWING STATUS: Released				TOLERANCES DO NOT APPLY	UNITS	SIZE
DATE: 7/9/25	PRODUCTION APPROVED FOR RELEASED STATUS ONLY				DIMENSIONS ARE NOMINAL	mm [inch]	B
				I LCMVAP61026026 REV A			
				FORM FEG036, Rev. C			