

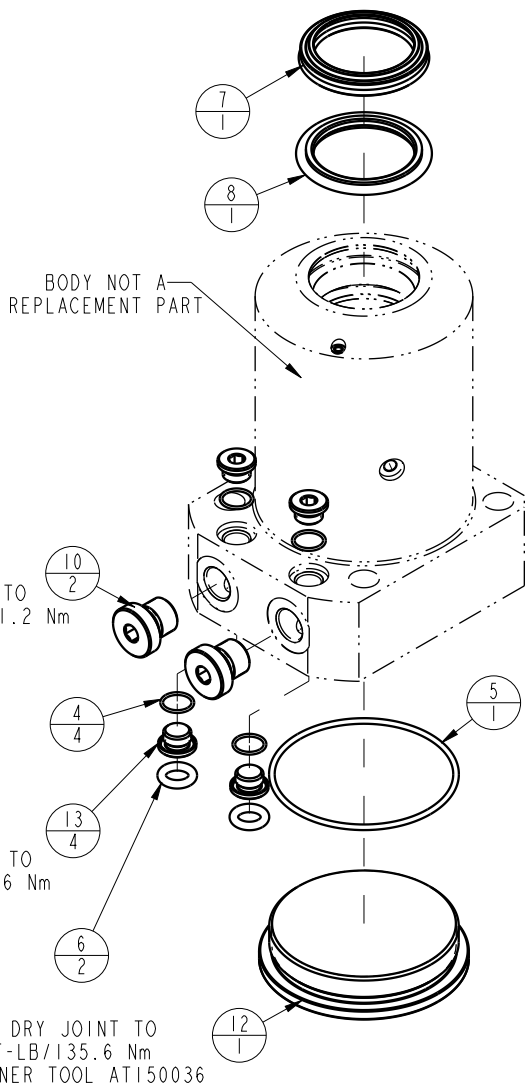



NO	QTY	PART NO	DESCRIPTION	SEAL KIT
1	1	21510004	NUT, JAM, HEX, M18-1.50	
2	3	23350087	SPRING, COMPRESSION	X
3	3	23650011	BALL, TUNGSTEN-CARBIDE, 8mm	X
4	4	39051080	O-RING, (10mm X 1)	X
5	1	39051085	O-RING, (63mm X 2)	X
6	2	39051088	O-RING, (8mm X 3)	X
7	1	39053046	SEAL, WIPER, SNAP IN, WED, 36, 94A, AU	X
8	1	39056006	SEAL, STEP, ROD, 36	X
9	1	39056025	SEAL, CAP, PISTON, 63, 90A, AU GRPHT FLD	X
10	2	43068006	PLUG, PORT, HOLLOW HEX, G1/4	
11	1	81400125	PLUNGER, SC, 7MPa, 63B, STR	
12	1	81400155	CAP, LC/SC, 7MPa, 63B	
13	4	81400201	PLUG, MANIFOLD, 7MPa, M10	
14	3	81400204	PIN, STOP, BALL, METRIC, 8mm BALL	X
N/A	N/A	L6014630	KIT, SEAL, SC, 7MPa, 63B	NOTED

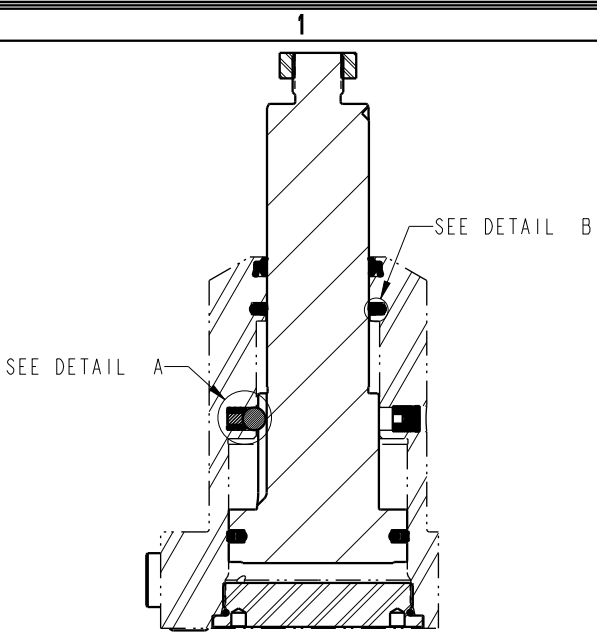

TORQUE TO 73.8 FT-LB/100 Nm

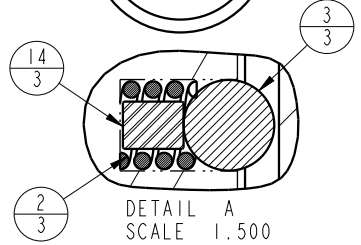

USE GREASE TO HOLD SPRING, STOP PIN, & BALL IN BODY PRIOR TO INSTALLING PLUNGER



DETAIL B SCALE 3.000

TORQUE TO 23 FT-LB/31.2 Nm

TORQUE DRY JOINT TO 50 IN-LB/5.6 Nm

TORQUE DRY JOINT TO 100 FT-LB/135.6 Nm USING SPANNER TOOL AT150036

BODY NOT A REPLACEMENT PART

PARTS LIST	
	VEKTEK, INC. 1334 E. SIXTH AVE. P.O. BOX 625 EMPORIA, KS. 66801 U.S.A.
ASSEMBLIES AFFECTED L1416300S	PARTS LIST, ASSY, SC, BF, 7MPa, 63B, STR
DATE: 9-15-16	SIZE A LPL1458
DRAWING STATUS: *** PRODUCTION APPROVED FOR RELEASED STATUS ONLY	REV B

B	3273	RELEASE	JDW	08/15/18
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE
DRW BY:	TWA	DRAWING STATUS: ***		
DATE:	9-15-16	PRODUCTION APPROVED FOR RELEASED STATUS ONLY		