


LUBRICATE ALL SEALS WITH CLEAN HYDRAULIC OIL PRIOR TO ASSEMBLY.
DO NOT USE SILICONE BASED LUBRICANTS.




REFERENCE NOTE
THIS MANUAL PO CHECK VALVE TAKES 3.5 LBS PER 100 PSI TO RELEASE
OR 15.568 NEWTON PER 0.965 BAR TO RELEASE

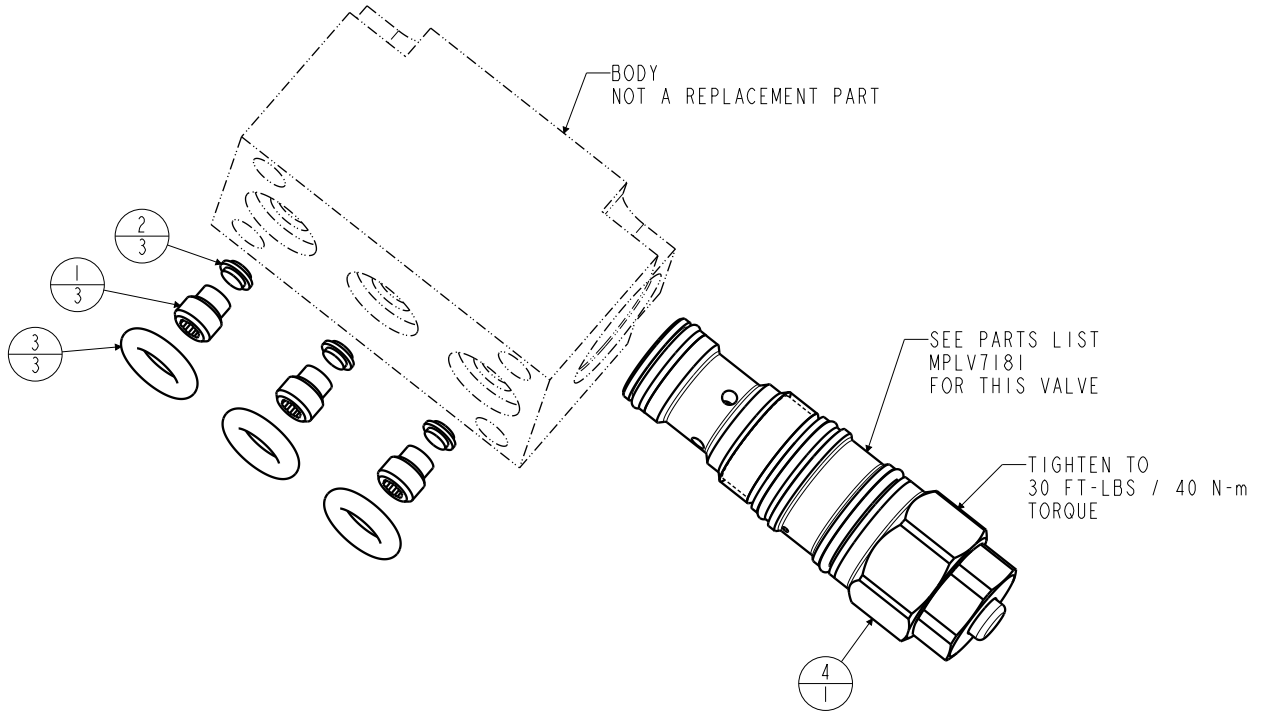

WEIGHT 1.94 LBS

N/A	N/A	62310501	KIT, FILTER	NOTED
4	1	47033371	ASSY, VLV, PO CHECK, CM, MANUAL	
3	3	39000050	O-RING, (-204)	
2	3	31050006	SCREEN, FILTER, SAE2	
1	3	30677212	PLUG, FILTER, SAE 2	
No.	QTY	PART No.	DESCRIPTION	FILTER KIT

PARTS LIST	 VEKTEK VEKTEK, INC. 1334 E. SIXTH AVE. P.O. BOX 625 EMPORIA, KS. 66801 U.S.A.
	ASSEMBLIES AFFECTED 47033172
PARTS LIST, ASSY, MANIFOLD, PO CHECK, MM, MANUAL SIZE A MPLV7182	REV A SHEET 1 OF 1

A	5635	RELEASE	JDW	03/21/25
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE
DRW BY:	JDW	DRAWING STATUS: Released		
DATE:	03/21/25	PRODUCTION APPROVED FOR RELEASED STATUS ONLY		

FORM FEG035_PL_ASIZE, REV. B