



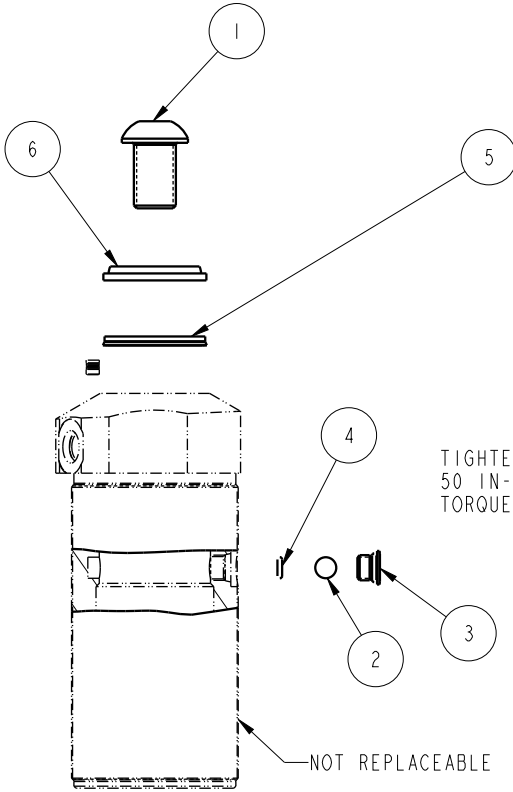


LUBRICATE ALL SEALS WITH CLEAN HYDRAULIC FLUID PRIOR TO ASSEMBLY. DO NOT USE SILICONE BASED LUBRICANTS!

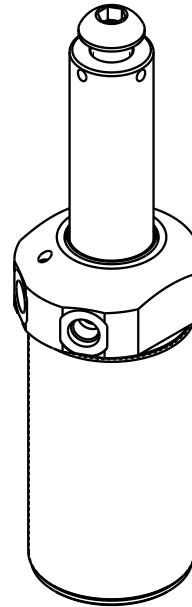


TIGHTEN TO 50 IN-LBS TORQUE

NOT REPLACEABLE

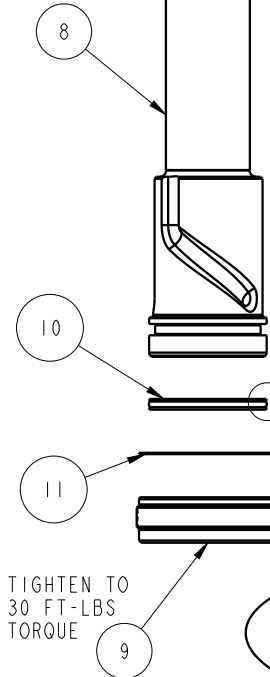

TIGHTEN TO 30 FT-LBS TORQUE

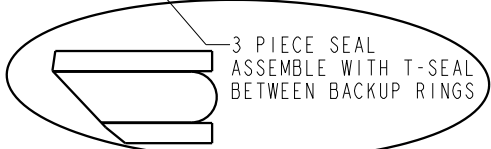

NO	QTY	PART NO	DESCRIPTION	STD SEAL KIT	FKM SEAL KIT
1	1	21410022	BHCS, 5/8-18 x 1, ALY		
2	1	23600013	BALL STEEL, ALLOY, 312	X	X
3	1	30601130	ASSY, PLUG, SOCH, SAE 3, 303 SSTL		
4	1	39000038	O-RING, (-008)	X	39051021
5	1	39011060	SEAL, BEVEL W/HEEL INSERT, 1-1/4 x 1/8 x 1-1/2	X	39052015
6	1	39053005	WIPER, SNAP-IN, (1-1/4)	X	X
7	1	81501800	BODY, SC, TB, 5000		
8	1	81511800	PLUNGER, SC, 5000#		
9	1	81531800	RETAINER, SC, 5000		
10	1	39H11056	SEAL, T, (1 9/16X5/32X1 3/4)	X	39V11056
11	1	39T55004	GASKET, (-134)	X	X
N/A	N/A	60150227	KIT, SEAL,	NOTED	N/A
N/A	N/A	6V150218	KIT, SEAL, FKM,	N/A	NOTED

### PARTS LIST



VEKTEK, INC.  
1334 E. SIXTH AVE. P.O. BOX 625  
EMPORIA, KS. 66801 U.S.A.

ASSEMBLIES AFFECTED  
15-0218-00-L(F)  
15-0218-00-R(F)  
15-0218-00-S(F)

SIZE A  
PL1509

REV S

S	5744	RELEASE	BDC	6/23/25
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE
DRW BY:	ALS	<b>DRAWING STATUS: Released</b>		
DATE:	3/18/21	PRODUCTION APPROVED FOR RELEASED STATUS ONLY		

FORM FEG035\_PL\_ASIZE, REV. B

SHEET 1 OF 1