
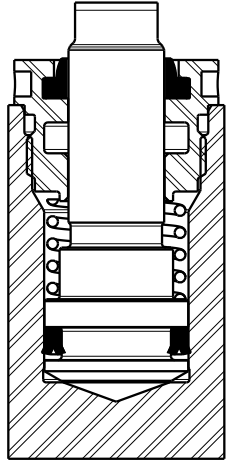
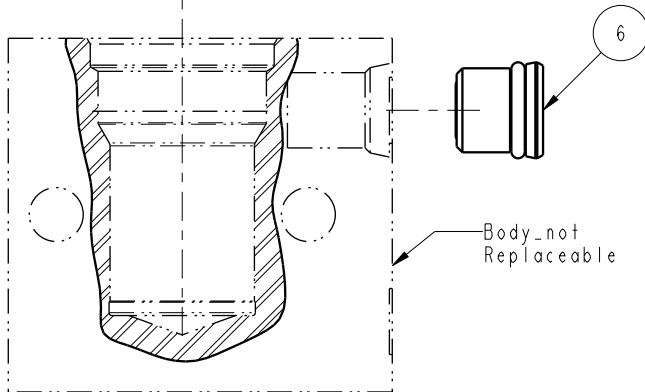

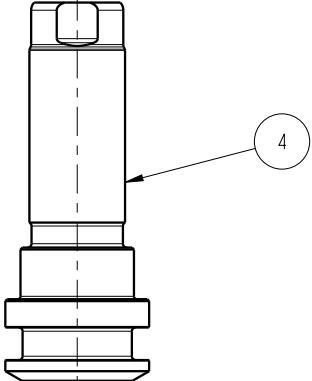




Lubricate all seals with clean hydraulic fluid prior to assembly.
Do not use silicone based lubricants.



| | | |
|---------------------------------|-------------------------------------|--------------------------|
| Standard Seal Kit 60-2011-08 | Fluorocarbon Seal Kit 6V-2011-08 | Spring Kit 61-2003-08 |
| 39-0100-13 | 39-0120-00 | 23-3130-07 |
| 39-0120-11 | 39-0120-11 | |

| No. | QTY | PART No. | DESCRIPTION |
|-----|-----|----------|---------------------------------|
| 6 | 1 | 92090001 | ASSY, BREATHER, SAE #4 |
| 5 | 1 | 82030802 | GLAND, CYL, BB, DA, 2200 |
| 4 | 1 | 82010803 | PISTON, CYL, BB, 2200, .25 STRK |
| 3 | 1 | 39012011 | WIPER, SNAP-IN, (1/2) |
| 2 | 1 | 39010013 | SEAL, BEVEL, 9/16 X 3/32 X 3/4 |
| 1 | 1 | 23313007 | SPRING, COMPRESSION |

| | |
|-----------------------------------|--|
| <h3>PARTS LIST</h3> |  VEKTEK VEKTEK, INC. 1334 E. SIXTH AVE. P.O. BOX 625 EMPORIA, KS. 66801 U.S.A. |
| | Model Number 20-1108-00 20-1108-00F |
| ASSY, CYL, BB, 2200, .25 STRK, SA | SIZE A |
| PL-2043 | REV H |

| | | | | |
|---------|------------------------|--|------------|---------|
| H | 5499 | RELEASE | NPETERS | 9/23/24 |
| REV | IN ACCORDANCE WITH ECN | EFFECTIVE DATE | REVISED BY | DATE |
| DRW BY: | JACOB | DRAWING STATUS: Released PRODUCTION APPROVED FOR RELEASED STATUS ONLY | | |
| DATE: | 7-6-90 | | | |