


LUBRICATE ALL SEALS WITH CLEAN HYDRAULIC OIL PRIOR TO ASSEMBLY.
DO NOT USE SILICONE BASED LUBRICANTS.



| N/A | N/A | 6V200214 | SEAL KIT, FKM | | NOTED |
|-----|-----|----------|---------------------------------------|---------------|--------------|
| N/A | N/A | 60200215 | SEAL KIT, STANDARD | | NOTED |
| 7 | I | 39H11031 | SEAL,T, (1 5/16X5/32X1 1/2) | X | 39V11031 |
| 6 | I | 82031501 | GLAND, CYL, 8800 & 39.9 KN | | |
| 5 | I | 82011506 | PISTON,CYL,8800,2 STRK | | |
| 4 | I | 39050020 | WIPER,SNAP-IN, (1-1/8) | X | X |
| 3 | I | 39011048 | SEAL, LL, (1-1/8 X 1/8 X 1/8 X 1-3/8) | X | 39012007 |
| 2 | I | 39001013 | O-RING, (-029) | X | 39012014 |
| 1 | I | 30601144 | PLUG, SOCH, SAE 4 | | |
| No. | QTY | PART No. | DESCRIPTION | Std. Seal Kit | FKM Seal Kit |

PARTS LIST

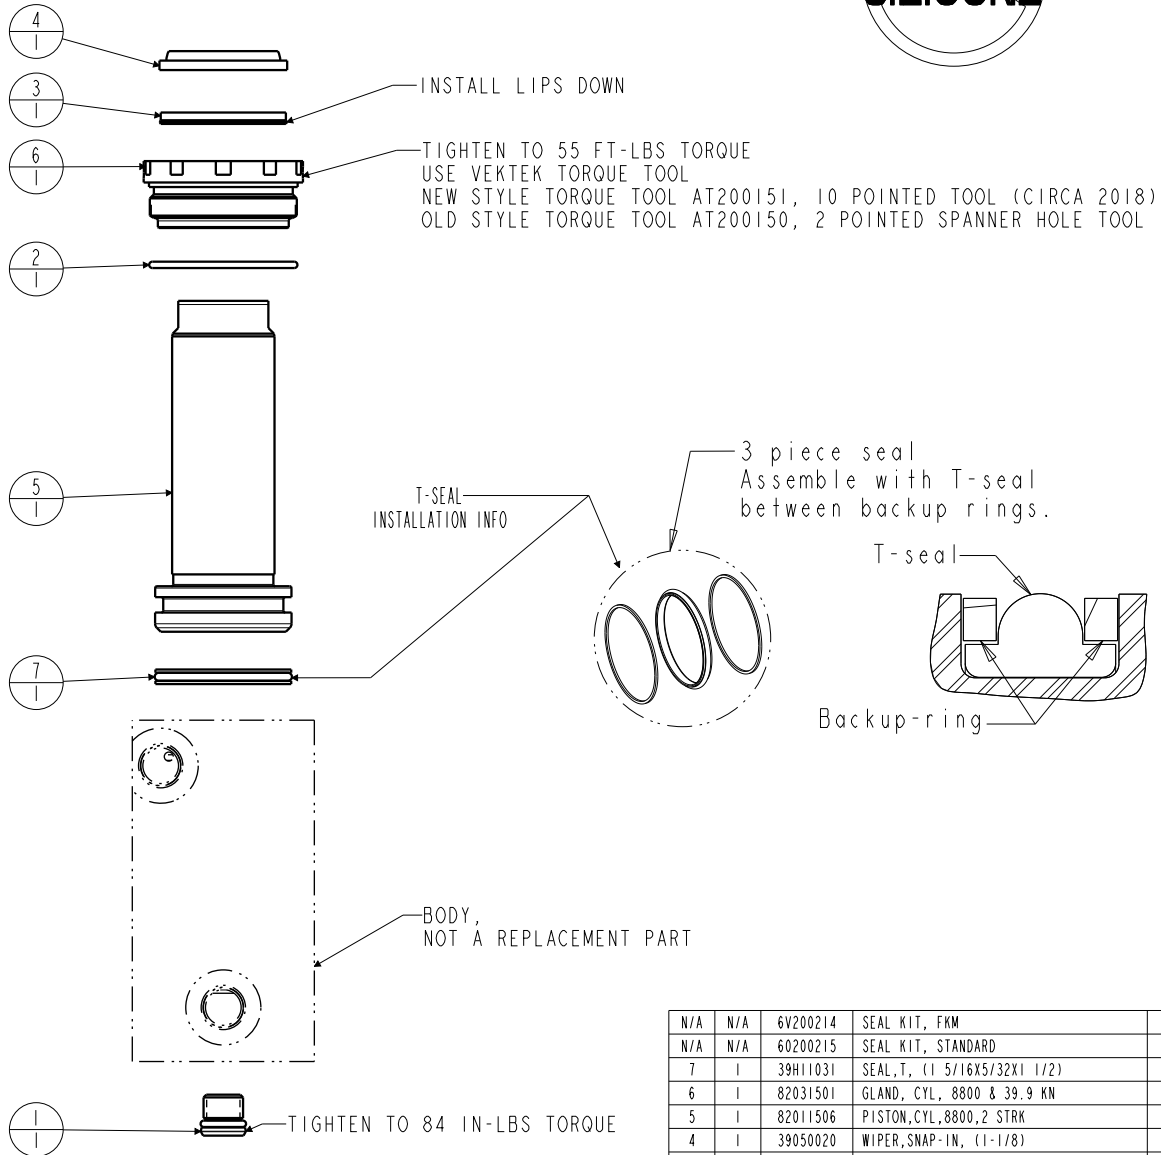

VEKTEK, INC.
1334 E. SIXTH AVE. P.O. BOX 625
EMPORIA, KS. 66801 U.S.A.

ASSEMBLIES AFFECTED
20121502
20121502F

PARTS LIST, ASSY,CYL,BB,8800,2.0 STRK,DA

SIZE A
PL2065

REV J

| | | | | |
|----------------|--|----------------|------------|---------|
| J | 5499 | RELEASE | NPETERS | 9/23/24 |
| REV | IN ACCORDANCE WITH ECN | EFFECTIVE DATE | REVISED BY | DATE |
| DRW BY: JACOB | DRAWING STATUS: Released | | | |
| DATE: 08/06/90 | PRODUCTION APPROVED FOR RELEASED STATUS ONLY | | | |