
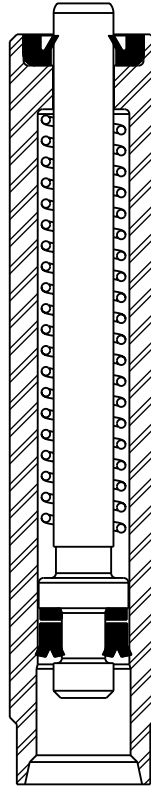
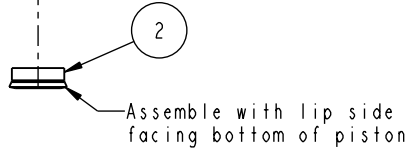
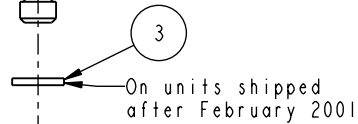
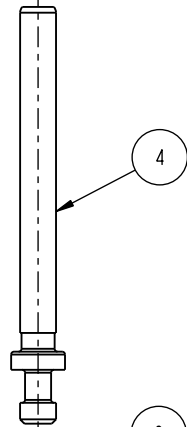



Lubricate all seals with clean hydraulic fluid prior to assembly.  
Do not use silicone based lubricants.

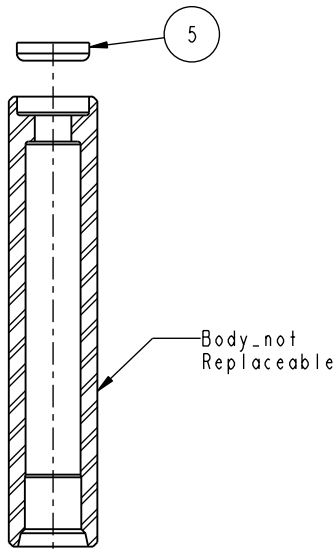

Standard Seal Kit 60-2001-04	Fluorocarbon Seal Kit 6V-2001-04	Spring Kit 61-2004-04
39-V100-29	39-V100-29	23-3110-27
39-0100-11	39-V100-11	
39-0540-09	39-0540-09	

No.	QTY	PART No.	DESCRIPTION
5	1	39V10029	WIPER, PRESS-IN
4	1	82010404	PISTON, CYL, 550, 1.25 STRK
3	1	39054009	RING, BU, (-106)
2	1	39010011	SEAL, BEVEL, 3/16 X 3/32 X 3/8
1	1	23311027	SPRING

<b>PARTS LIST</b>	 <b>VEKTEK</b> VEKTEK, INC. 1334 E. SIXTH AVE. P.O. BOX 625 EMPORIA, KS. 66801 U.S.A.
	<b>Model Number</b> 20-0104-12 20-0104-12F

G	2111	RELEASE	MES	10-19-09
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE
DRW BY: JACOB	DRAWING STATUS: Released PRODUCTION APPROVED FOR RELEASED STATUS ONLY			
DATE: 11-04-94				

<b>Model Number</b> 20-0104-12 20-0104-12F		ASSY, CYL, TB, 550, 1.25 STRK, SA	
SIZE A	<b>PL-2075</b>	REV <b>G</b>	SHEET 1 OF 1

FORM FEG035\_PL\_ASIZE, REV. A