



LUBRICATE ALL SEALS WITH CLEAN HYDRAULIC OIL PRIOR TO ASSEMBLY. DO NOT USE SILICONE BASED LUBRICANTS.




TIGHTEN TO 55 FT-LBS TORQUE
USE VEKTEK TORQUE TOOL
NEW STYLE TORQUE TOOL AT200151, 10 POINTED TOOL (CIRCA 2018)
OLD STYLE TORQUE TOOL AT200150, 2 POINTED SPANNER HOLE TOOL

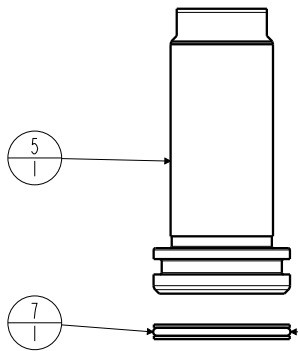


T-SEAL
INSTALLATION INFO


3 piece seal
Assemble with T-seal
between backup rings.



T-seal



Backup-ring



BODY,
NOT A REPLACEMENT PART



TIGHTEN TO
84 IN-LBS
TORQUE

No.	QTY	PART No.	DESCRIPTION	Std. Seal Kit	FKM Seal Kit
N/A	N/A	6V200214	SEAL KIT, FKM		NOTED
N/A	N/A	60200215	SEAL KIT, STANDARD	NOTED	
7	1	39H11031	SEAL, T, (1 5/16X5/32X1 1/2)	X	39V11031
6	1	82031501	GLAND, CYL, 8800 & 39.9 KN		
5	1	82011507	PISTON, CYL, 8800, 1.5 STRK		
4	1	39050020	WIPER, SNAP-IN, (1-1/8)	X	X
3	1	39011048	SEAL, LL, (1-1/8 X 1/8 X 1/8 X 1-3/8)	X	39012007
2	1	39001013	O-RING, (-029)	X	39012014
1	1	30601144	PLUG, SOCH, SAE 4		

PARTS LIST



VEKTEK, INC.
1334 E. SIXTH AVE. P.O. BOX 625
EMPORIA, KS. 66801 U.S.A.

ASSEMBLIES AFFECTED

PARTS LIST, ASSY, CYL, BB, 8800, 1.5 STRK, DA

20121504

20121504F

SIZE
A

PL2090

REV
H

SHEET 1 OF 1

H	5499	RELEASE	NPETERS	9/23/24
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE
DRW BY:	JACOB	DRAWING STATUS: Released		
DATE:	06/24/96	PRODUCTION APPROVED FOR RELEASED STATUS ONLY		

FORM FEG035_PL_ASIZE, REV. B