
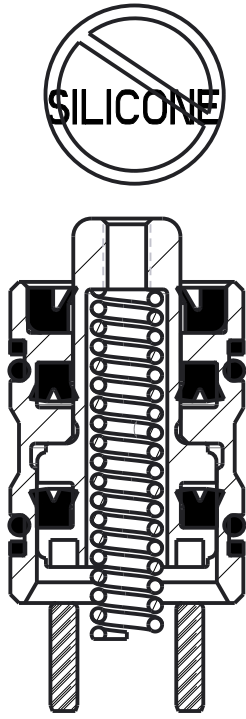



NO	QTY	PART NO	DESCRIPTION	21-4106-00	21-4106-01	STD SEAL KIT
1	1	23355011	SPRING, COMPRESSION	X	X	
2	2	39050035	O-RING, (-017)	X	X	X
3	2	39052041	SEAL, U-CUP, 3/8 X 1/8 X 5/8	X	X	X
4	1	39053023	WIPER, PRESS-IN, (3/8)	X	X	X
5	1	67010153	TAG, INSTALL, CYL, CM, SLIP-IN			X
6	1	82140001	PLUNGER, CYL, CM, PULL, 980LB		X	
-	1	82140002	PLUNGER, CYL, CM, PULL, 980LB	X		
7	2	90199970	PIN, DOWEL, 3/32 X 3/8, STD, STL, HDN	X	X	
8	2	39F54015	BU RING (-017)	X	X	X
N/A	N/A	64014080	RETAINER, MTNG, CYL, CM, 980LB	X	X	
N/A	N/A	60210114	KIT, SEAL, CYL, CM, PULL, 980LB	N/A	N/A	NOTED
N/A	N/A	IS2102	INSTRUCTIONS, INSTALL, CYL, CM, SLIP-IN	N/A	N/A	N/A

WHEN USED WITH RETAINING RING P/N 64-0140-80
TORQUE 8-32 BOLTS TO 29 IN.-LBS

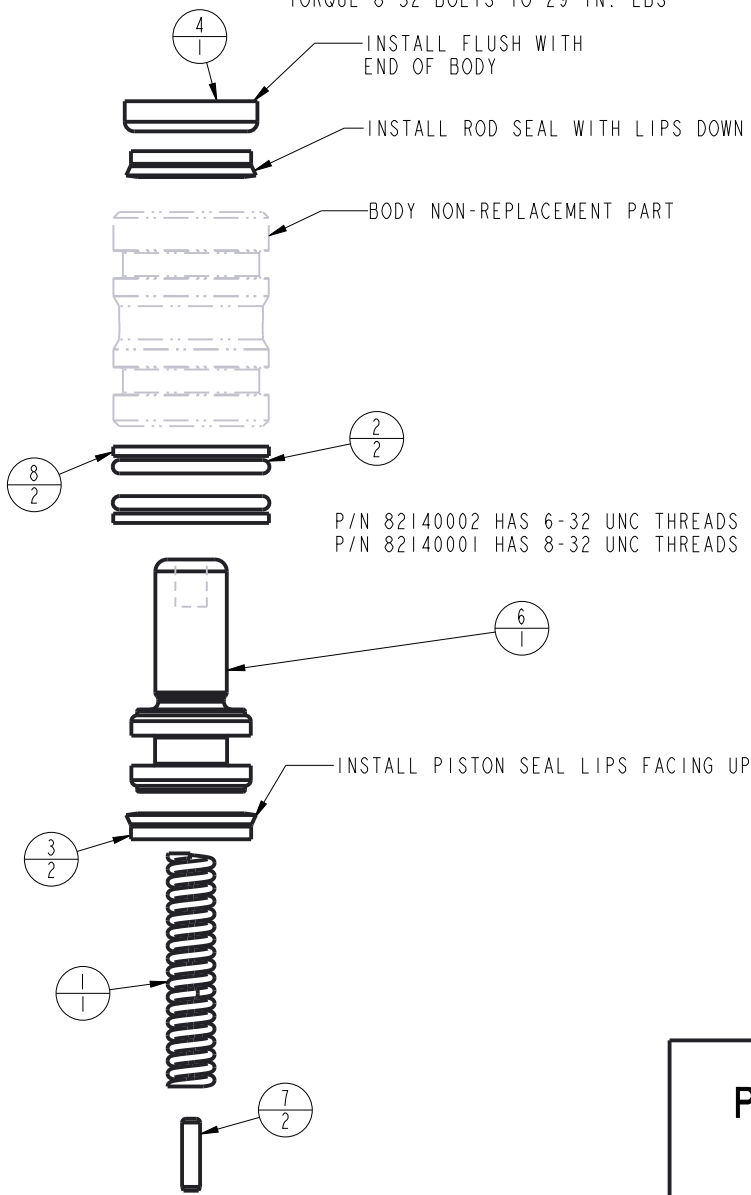

LUBRICATE ALL SEALS WITH CLEAN HYDRAULIC OIL PRIOR TO ASSEMBLY
DO NOT USE SILICONE BASED LUBRICANTS

PARTS LIST	 VEKTEK, INC. 1334 E. SIXTH AVE. P.O. BOX 625 EMPORIA, KS. 66801 U.S.A.	
	ASSEMBLIES AFFECTED	PARTS LIST, CYL, CM, PL DN, 980LB
21-4106-00	SLIP IN	
21-4106-01	SIZE	REV
	A	A

A	2753	RELEASE	DKC	12/29/14
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE
DRW BY: ABC	DRAWING STATUS: Released			
DATE: XX-YY-ZZ	PRODUCTION APPROVED FOR RELEASED STATUS ONLY			

CAVITY AND INSTALLATION INSTRUCTIONS


PLEASE READ PRIOR TO OPERATION

Cavity Forming



-It is recommended that all cavities be prepared using a ball hone such as a *Flex-Hone™. This will deburr and round sharp edges to prevent seal damage. The honing prepares cavity for cylinder installation.

-Intersecting feed holes should be adequately deburred and chamfered to prevent seal damage.

*Flex-hone™ is a registered trademark of:
 Brush Research Manufacturing Co. Inc.
 Los Angeles, CA, 323-261-2193
 Please Contact Brush Research for additional information.

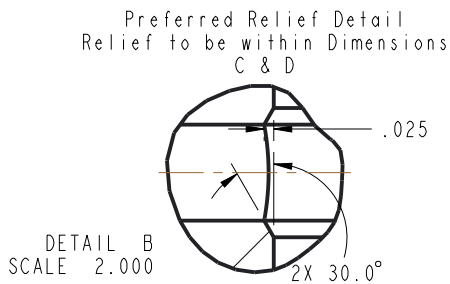

OPTIONAL CYLINDER RETAINING RING

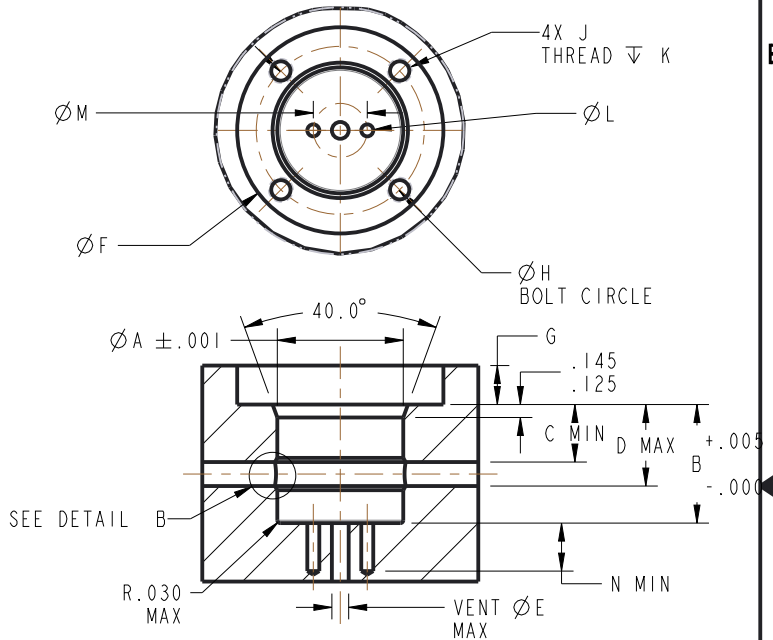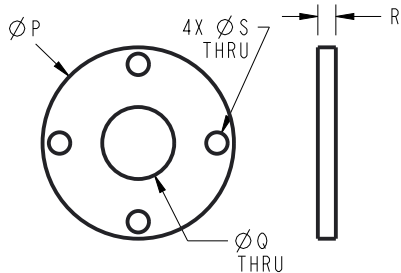

MODEL NO.	CAPACITY	A	B	C	D	E	F	G	H	J	K	L*	M*	N*	P	Q	R	S
21-4106-XX	980	.813	1.120	.44	.72	.16	1.40	.31	1.13	8-32 UNC	.33	.13	.44	.31	1.330	.50	.125	.173
21-4109-00	2000	1.188	1.120	.44	.72	.18	1.86	.31	1.56	8-32 UNC	.33	.13	.53	.40	1.832	.75	.125	.173
21-4109-01	2000	1.188	1.245	.44	.84	.18	1.86	.31	1.56	8-32 UNC	.33	.13	.53	.40	1.832	.75	.125	.173
21-4111-XX	2950	1.313	1.245	.44	.84	.18	2.15	.41	1.75	1/4-20 UNC	.38	.13	.56	.40	2.125	.75	.125	.257
21-4113-XX	5200	1.751	1.370	.44	.97	.33	2.83	.53	2.31	5/16-18 UNC	.47	.16	.88	.40	2.782	1.00	.187	.328
21-4116-XX	9000	2.126	1.495	.44	1.09	.35	3.40	.67	2.81	3/8-16 UNC	.50	.28	1.00	.60	3.375	1.12	.250	.391
21-4121-00	17100	2.876	1.620	.44	1.22	.40	4.59	.90	3.81	1/2-13 UNC	.63	.28	1.57	.60	4.563	1.25	.375	.515

NOTE: CAVITY UTILIZES OPTIONAL RETAINING RING AVAILABLE FROM VEKTEK, INC.
 ADDITIONAL RETAINING RING INFORMATION IS CONTAINED IN SHEET 3.

*THESE FEATURES ARE ONLY NEEDED IF ANTI-ROTATION PINS ARE USED.

**ANTI-ROTATE PINS AND RETURN SPRINGS INCLUDED WITH CYLINDERS.

INSTALLATION INSTRUCTIONS



VEKTEK, INC.
 1334 E. SIXTH AVE. P.O. BOX 625
 EMPORIA, KS. 66801 U.S.A.

A	2753	RELEASE	DKC	10/1/14
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE
DRW BY:	DKC	DRAWING STATUS: Released		
DATE:	9/23/14	PRODUCTION APPROVED FOR RELEASED STATUS ONLY		

ASSEMBLIES AFFECTED
 21-4106-XX 21-4109-XX
 21-4111-XX 21-4113-XX
 21-4116-XX 21-4121-00

INSTRUCTIONS, INSTALL, CTL, CH, SLIP-IN	
SLIP IN	REV A
SIZE A	IS2102

FORM FEG041-1S.AS1Z, REV. B

SHEET 1 OF 3

1

2

INSTALLATION INSTRUCTIONS CONTINUED


Installation Notes

- It is recommended that all cavities be prepared using a ball hone such as a *Flex-Hone™. This will deburr and round sharp edges to prevent seal damage and prepare cavity for cylinder installation.
- All seals should be lubricated with a non-silicone grease (recommended) or clean hydraulic oil prior to installation.


Installation

1. Lubricate all seals with non-silicone grease (recommended) or clean hydraulic oil.
2. Install return spring in plunger cavity with a small amount of grease to hold it in place during installation. See view below. A table of return spring part numbers is included below.

Cylinder P/N	Return Spring P/N
21-4106-XX	23-3550-11
21-4109-XX	23-3550-12
21-4111-XX	23-3550-12
21-4113-XX	23-3550-14
21-4116-XX	23-3550-15
21-4121-00	23-3550-16

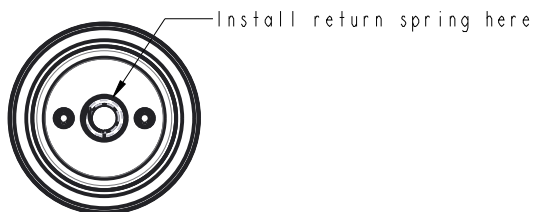

3. If using anti-rotate pins install a bolt and jam nut in plunger to help align pins. Press the piston end of the plunger even with end of body. See view below.

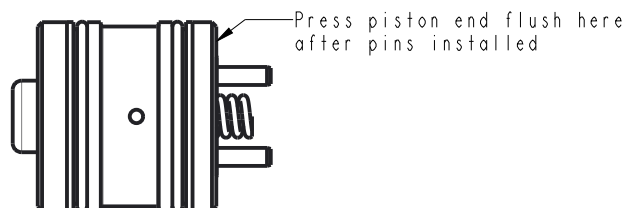

- a. Press cylinder into cavity until plunger begins to extend ensuring cylinder goes in evenly to prevent cavity or seal damage.
 - b. Using the bolt gently turn the plunger while applying slight downward force until plunger begins to retract. This ensures alignment of the anti-rotation pins.
 - c. Remove bolt and jam nut. Visually inspect spring through threaded hole in plunger to verify return spring is properly positioned.
4. Press cylinder body until flush with the start of the cavity. Stop if an increase in resistance is felt.
 - a. If using the optional retention ring, see chart below for proper torque.

MODEL NO.	RETAINER NO.	BOLT SIZE	TORQUE
21-4106-XX	64-0140-80	8-32 UNC	29 IN-LBS
21-4109-XX	64-0141-10	8-32 UNC	29 IN-LBS
21-4111-XX	64-0141-30	1/4-20 UNC	63 IN-LBS
21-4113-XX	64-0141-70	5/16-18 UNC	20 FT-LBS
21-4116-XX	64-0142-10	3/8-16 UNC	24 FT-LBS
21-4121-00	64-0142-80	1/2-13 UNC	62 FT-LBS

INSTALLATION INSTRUCTIONS



VEKTEK, INC.
1334 E. SIXTH AVE. P.O. BOX 625
EMPORIA, KS. 66801 U.S.A.

A	2753	RELEASE	DKC	10/1/14
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE
DRW BY: DKC	DRAWING STATUS: Released			
DATE: 9/23/14	PRODUCTION APPROVED FOR RELEASED STATUS ONLY			

ASSEMBLIES AFFECTED

21-4106-XX 21-4109-XX
21-4111-XX 21-4113-XX
21-4116-XX 21-4121-00

INSTRUCTIONS, INSTALL, CTL, CN, SLIP-IN	
SLIP IN	
SIZE A	IS2102
REV A	

FORM FEG041-1S.AS1ZE, REV. B

1

2

SHEET 3 OF 3