


LUBRICATE ALL SEALS WITH CLEAN HYDRAULIC OIL PRIOR TO ASSEMBLY. DO NOT USE SILICONE BASED LUBRICANTS.

REFERENCE NOTE
THIS PO CHECK VALVE TAKES 3.5 LBS PER 100 PSI TO RELEASE

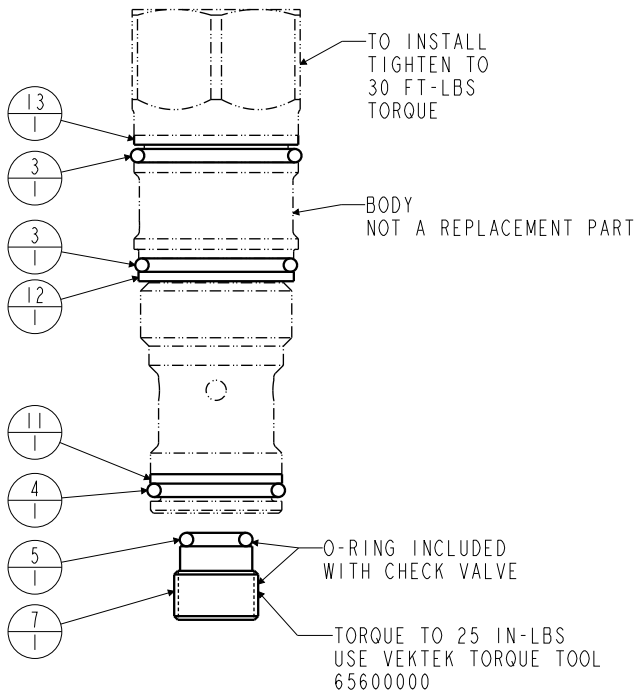

No.	QTY	PART No.	DESCRIPTION	Std. Seal Kit
N/A	N/A	60701200	SEAL KIT, STANDARD	NOTED
13	1	39F54015	BU RING (-017)	X, QTY 1
12	1	39F54014	BU RING, (-016)	X, QTY 1
11	1	39F54013	BU RING, (-015)	X, QTY 1
10	1	87033111	ROD, ACTUATOR, PO CHECK, MANUAL	
9	1	87033110	PLUG, PO CHECK, SAE 6, MANUAL	
8	1	87033103	PISTON, AB, PILOT CHK.	
7	1	70343760	VALVE, CHECK, SAE 4, 30 PSI	
6	3	39054010	BU RING, (-012)	X, QTY 2
5	1	39051004	O-RING, (-010)	
4	1	39050037	O-RING, (-015)	X, QTY 1
3	2	39050035	O-RING, (-017)	X, QTY 2
2	2	39000031	O-RING, (-012)	X, QTY 1
1	1	39000026	O-RING, (-906)	X, QTY 1

PARTS LIST



VEKTEK, INC.
1334 E. SIXTH AVE. P.O. BOX 625
EMPORIA, KS. 66801 U.S.A.

ASSEMBLIES AFFECTED
70333772

PARTS LIST, ASSY, VLV, PO CHECK, CM, MANUAL

SIZE
A PL7139

REV
A

SHEET 1 OF 1

WEIGHT .373 LBS

A	5635	RELEASE	JDW	02/21/25
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE
DRW BY:	JDW	DRAWING STATUS: Released		
DATE:	02/21/25	PRODUCTION APPROVED FOR RELEASED STATUS ONLY		

FORM FEG035_PL_ASIZE, REV. B