



LUBRICATE ALL SEALS WITH CLEAN HYDRAULIC OIL PRIOR TO ASSEMBLY.
DO NOT USE SILICONE BASED LUBRICANTS.

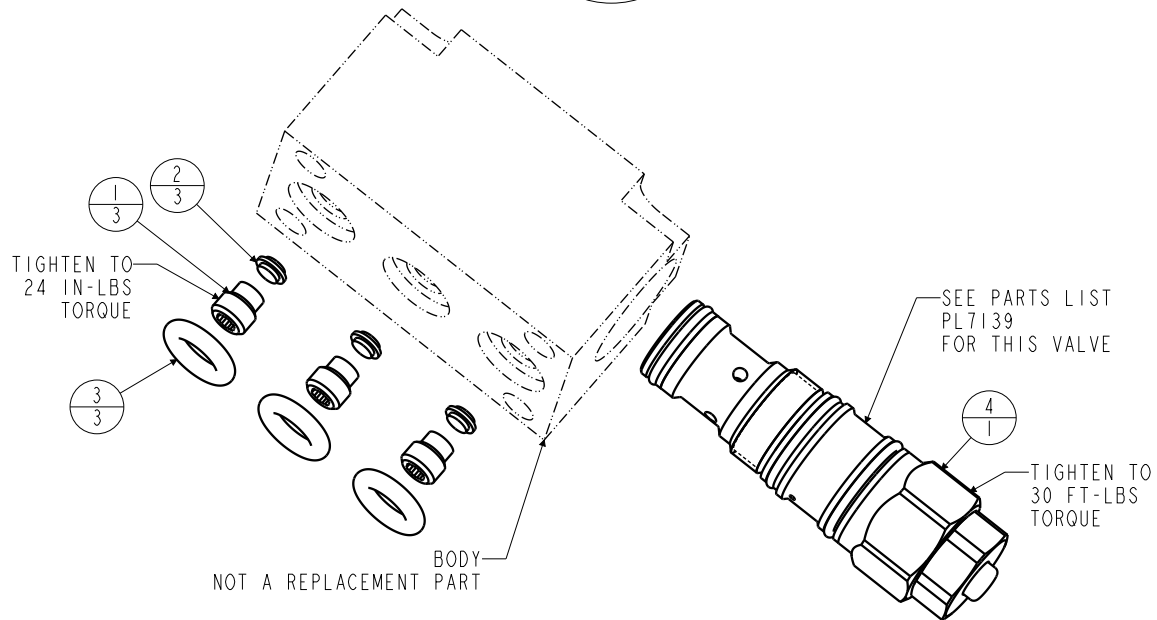

REFERENCE NOTE
THIS MANUAL PO CHECK VALVE
TAKES 3.5 LBS PER 100 PSI TO RELEASE

N/A	N/A	62310501	KIT, FILTER	NOTED
4	1	70333772	ASSY, VLV, PO CHECK, CM, MANUAL	
3	3	39000050	O-RING, (-204)	X, QTY 1
2	3	31050006	SCREEN, FILTER, SAE2	X, QTY 1
1	3	30677212	PLUG, FILTER, SAE 2	X, QTY 1
No.	QTY	PART No.	DESCRIPTION	FILTER KIT

WEIGHT 1.94 LBS

PARTS LIST	 VEKTEK VEKTEK, INC. 1334 E. SIXTH AVE. P.O. BOX 625 EMPORIA, KS. 66801 U.S.A.
	ASSEMBLIES AFFECTED 70331772
PARTS LIST, ASSY, MANIFOLD, PO CHECK, MM, MANUAL SIZE A PL7141	REV A SHEET 1 OF 1

A	5635	RELEASE	JDW	03/21/25
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE
DRW BY: JDW	DRAWING STATUS: Released			
DATE: 03/21/25	PRODUCTION APPROVED FOR RELEASED STATUS ONLY			

FORM FEG035_PL_ASIZE, REV. B