



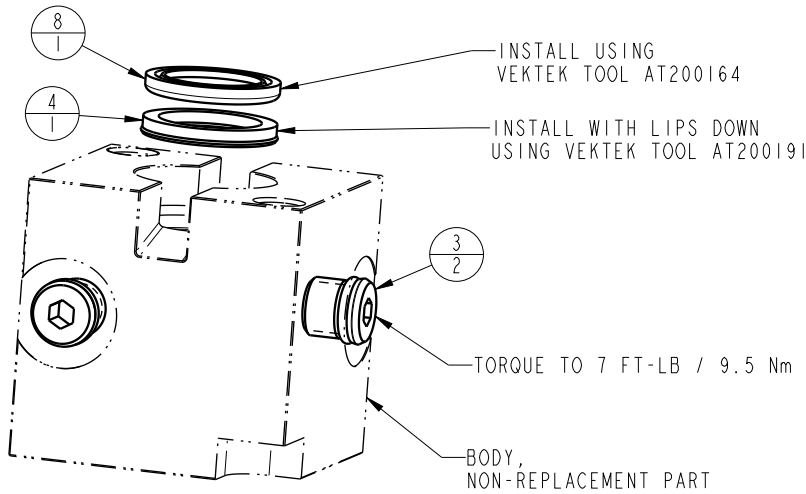


LUBRICATE ALL SEALS WITH CLEAN HYDRAULIC OIL PRIOR TO ASSEMBLY.
DO NOT USE SILICONE BASED LUBRICANTS.



SECTION A-A
SCALE 0.500

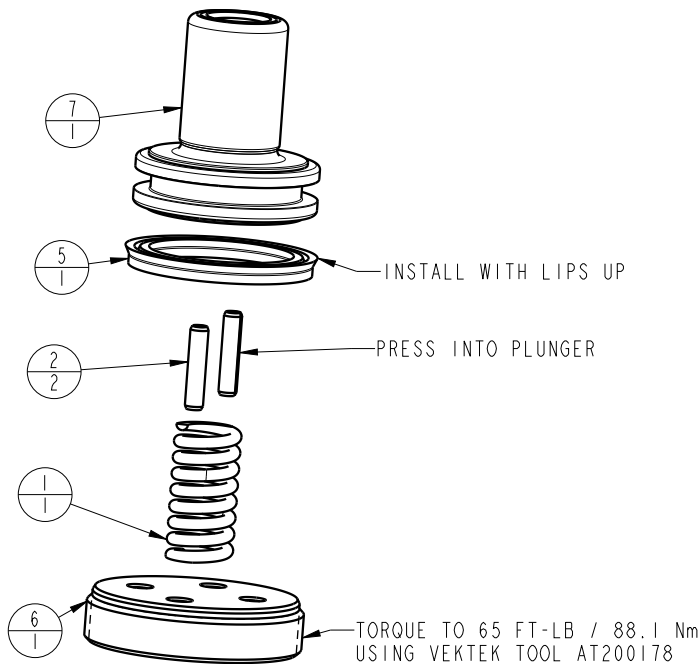

NO	QTY	PART NO	DESCRIPTION	STD SEAL KIT
1	1	23355014	SPRING, COMPRESSION	
2	2	23520004	PIN, SPRING, SLOTTED, 1/8 X 5/8, SST	
3	2	30601144	PLUG, SOCH, SAE 4	
4	1	39010021	SEAL, LL, (3/4 X 1/8 X 1/8 X 1)	X
5	1	39052045	SEAL, U-CUP, 1 1/8 X 1/8 X 1 3/8	X
6	1	82040013	CAP,CYL,BB,PULL,5200LB	
7	1	82140024	PLUNGER,CYL,CM,PULL,23.1kN	
8	1	39V10022	WIPER,PRESS-IN, (3/4)	X
N/A	N/A	60201120	SEAL KIT	NOTED

PARTS LIST



VEKTEK, INC.
1334 E. SIXTH AVE. P.O. BOX 625
EMPORIA, KS. 66801 U.S.A.

ASSEMBLIES AFFECTED
42-1243-01

PARTS LIST, ASSY, CYL, BB, PULL, 23.1kN, 4.5 STRK, M12x1.75

SIZE
A

MPLV2194

REV
A

SHEET 1 OF 1

A	3658	RELEASE	JDW	11/19/18
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE
DRW BY: JDW	DRAWING STATUS: Released			
DATE: 11/19/18	PRODUCTION APPROVED FOR RELEASED STATUS ONLY			

FORM FEG035_PL_ASIZE, REV. B