





LUBRICATE ALL SEALS WITH CLEAN HYDRAULIC OIL PRIOR TO ASSEMBLY.
DO NOT USE SILICONE BASED LUBRICANTS.

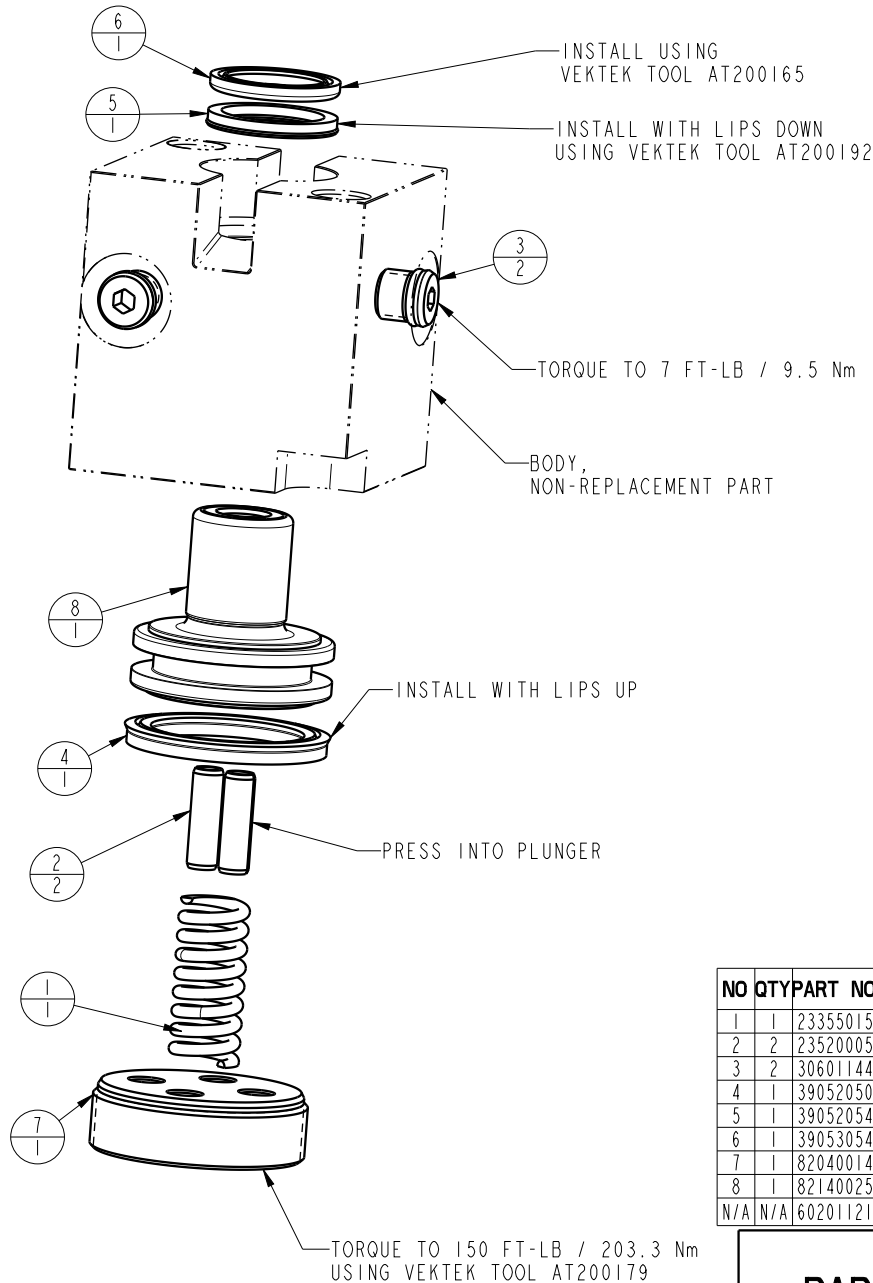

SECTION A-A
SCALE 0.500



NO	QTY	PART NO	DESCRIPTION	STD SEAL KIT
1	1	23355015	SPRING, COMPRESSION	
2	2	23520005	PIN, SPRING, SLOTTED, 1/4 X 7/8, SST	
3	2	30601144	PLUG, SOCH, SAE 4	
4	1	39052050	SEAL, U-CUP, 1 3/8 X 3/16 X 1 3/4	X
5	1	39052054	SEAL, LL, (7/8 X 1/8 X 1/8 X 1 1/8)	X
6	1	39053054	WIPER, PRESS-IN, (7/8)	X
7	1	82040014	CAP, CYL, BB, PULL, 9000LB	
8	1	82140025	PLUNGER, CYL, CM, PULL, 40kN	
N/A	N/A	60201121	SEAL KIT	NOTED

PARTS LIST



VEKTEK, INC.
1334 E. SIXTH AVE. P.O. BOX 625
EMPORIA, KS. 66801 U.S.A.

ASSEMBLIES AFFECTED
42-1246-00

PARTS LIST, ASSY, CYL, BB, PULL, 40kN, 8.0 STRK, M12x1.75

SIZE
A MPLV2195

REV
A

A	3658	RELEASE	JDW	11/19/18
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE
DRW BY:	JDW	DRAWING STATUS: Released		
DATE:	11/19/18	PRODUCTION APPROVED FOR RELEASED STATUS ONLY		

SHEET 1 OF 1

FORM FEG035_PL_ASIZE, REV. B