
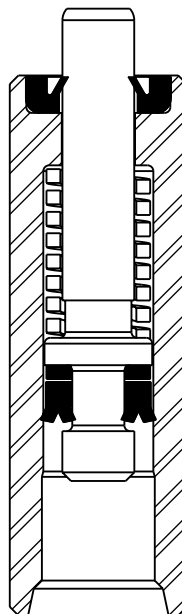
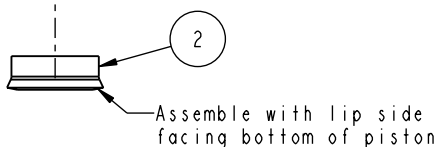
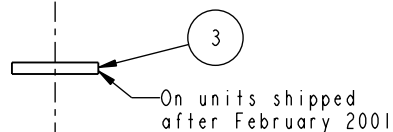
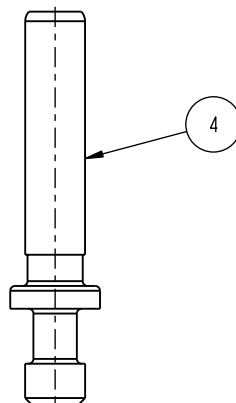



Lubricate all seals with clean hydraulic fluid prior to assembly.
Do not use silicone based lubricants.

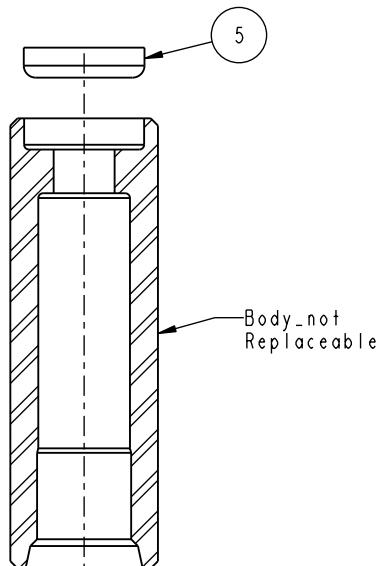

Standard Seal Kit 60-2001-04	Fluorocarbon Seal Kit 6V-2001-04	Spring Kit 61-2007-04
39-0100-11	39-V100-11	23-3110-25
39-0540-09	39-0540-09	
39-V100-29	39-V100-29	

No.	QTY	PART No.	DESCRIPTION
5	1	39V10029	WIPER, PRESS-IN
4	1	82010401	PISTON, CYL, 550, .25 STRK
3	1	39054009	RING, BU, (-106)
2	1	39010011	SEAL, BEVEL, 3/16 X 3/32 X 3/8
1	1	23311025	SPRING, COMPRESSION, DIE

PARTS LIST



VEKTEK, INC.
1334 E. SIXTH AVE. P.O. BOX 625
EMPORIA, KS. 66801 U.S.A.

Model Number
20-0104-02
20-0104-02F

ASSY, CYL, TB, 550, .25 STRK, SA

SIZE
A

PL-2073

REV
H

FORM FEG035_PL_ASIZE, REV. A

H	2111	RELEASE	MES	10-19-09
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE
DRW BY: JACOB	DRAWING STATUS: ECN			
DATE: 08-08-94	PRODUCTION APPROVED FOR RELEASED STATUS ONLY			

SHEET 1 OF 1