


LUBRICATE SEALS WITH CLEAN HYDRAULIC OIL PRIOR TO ASSEMBLY. DO NOT USE SILICONE BASED LUBRICANTS

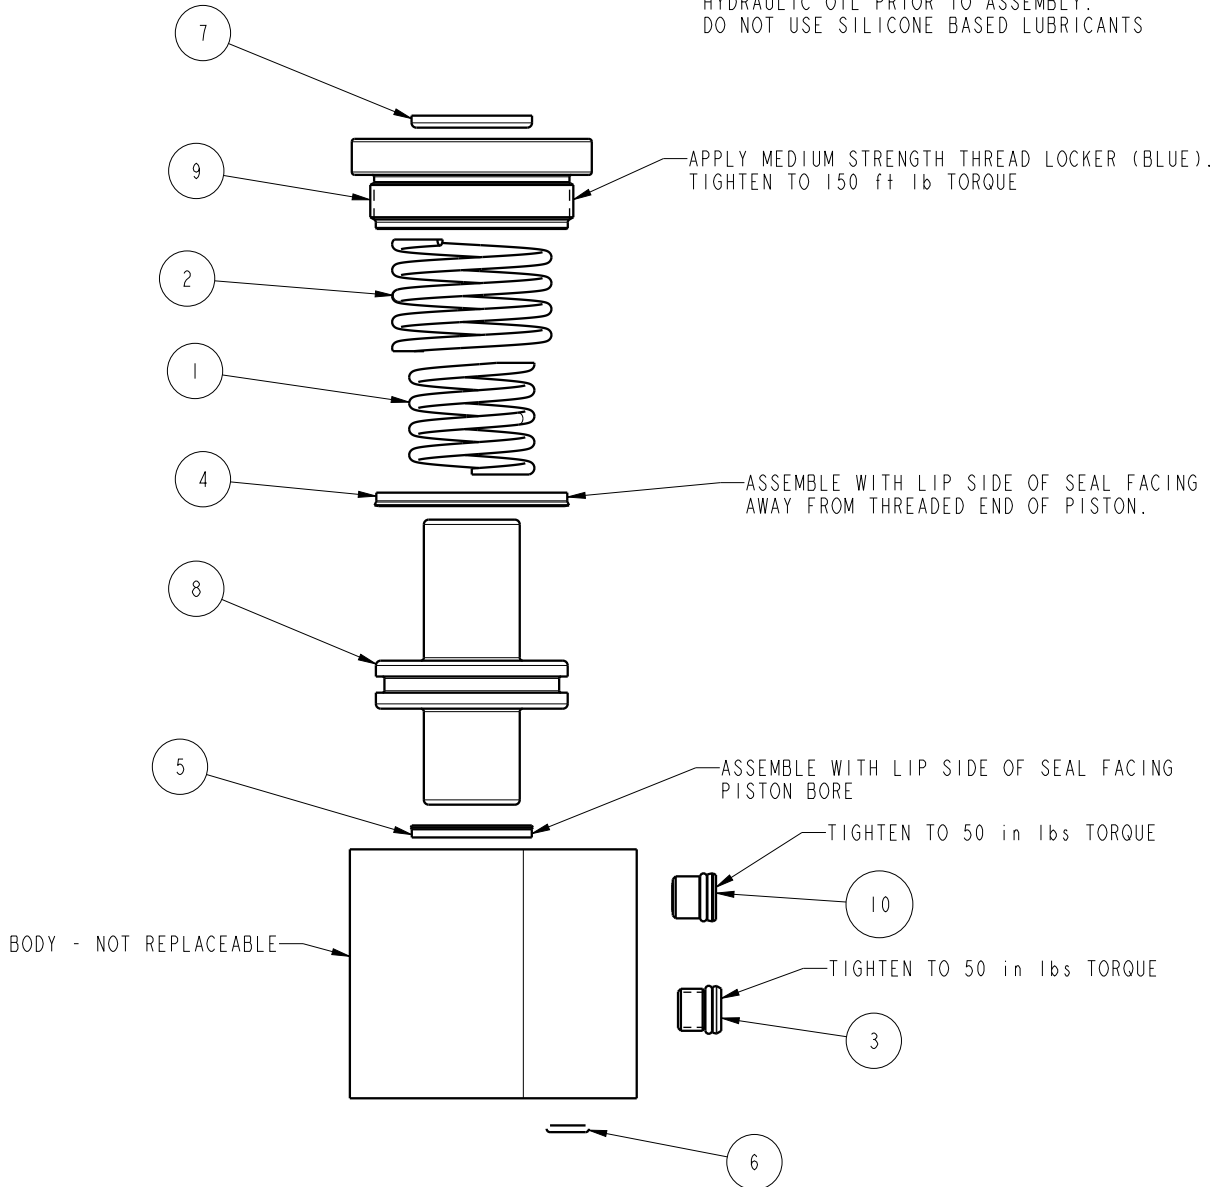

NO	QTY	PART NO	DESCRIPTION
1	1	23350078	SPRING, COMPRESSION
2	1	23350079	SPRING, COMPRESSION
3	1	30601144	PLUG, SOCH, SAE 4
4	1	39011029	SEAL, BEVEL, 1-13/16 X 3/32 X 2
5	1	39011047	SEAL, LL, (1 X 1/8 X 1/8 X 1-1/4)
6	1	39050042	O-RING, (-O11)
7	1	39053003	WIPER,PRESS-IN, (1)
8	1	82012001	PISTON, CYL, HR, 11700
9	1	82032009	GLAND, CYL, HR, 11700&53.2KN, SA
10	1	92090001	ASSY, BREATHER, SAE #4

Standard Seal Kit 60-2121-20	Fluorocarbon Seal Kit 6V-2121-20	Spring Kit 61-2021-21
39-0110-47	39-0520-05	23-3500-78
39-0100-29	39-0520-04	23-3500-79
39-0530-03	39-0530-03	

PARTS LIST	
	VEKTEK, INC. 1334 E. SIXTH AVE. P.O. BOX 625 EMPORIA, KS. 66801 U.S.A.
	PARTS LIST, ASSY, CYL, HR, 11700, SA, MM
ASSEMBLIES AFFECTED 21212005	SIZE A
DRAWING STATUS: Released	
PRODUCTION APPROVED FOR RELEASED STATUS ONLY	
FORM FEG035_PL_AS1ZE, REV. B	

A	3148	RELEASE	GAR	2/20/17
REV	IN ACCORDANCE WITH ECN	EFFECTIVE DATE	REVISED BY	DATE

SHEET 1 OF 1