
Solenoid Control Valves 3-Port, 2-Position

NEW

Solenoid Control Valves 3-Port, 2-Position

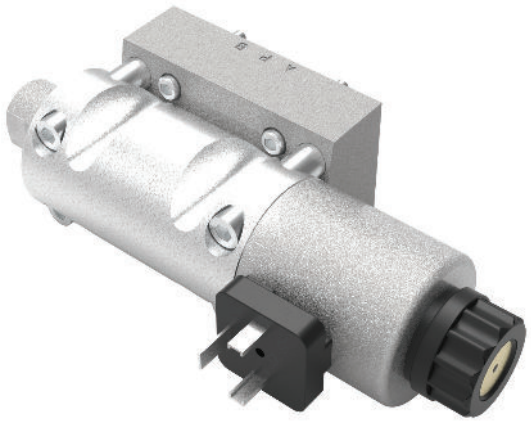



- Provide improved control of clamping circuits with true poppet design.
- Internal design promotes improved service life.
- Narrow width allows mounting of multiple valves on standard D03 manifolds.
- All valves have built-in P-Check for fail safe multi-valve operation.
- Seals and Coil can be easily replaced.
- Max Flow Rate is 25 lpm.
- Max Pressure is 400 bar.

Solenoid Control Valves: 3-Port, 2-Position

Model No.	Valve Function	Valve Connector Part No.	Solenoid Voltage	Power Usage (Watts)	Duty Rating
47-1115-02	Normally Closed	85-5342-91	24 VDC	30	100%
7I-1155-04	Normally Closed	87-1123-00	110 VAC	30	

* Supplied with rectified connectors that must be used to insure proper valve function. Use of any other connector will void the valve warranty.



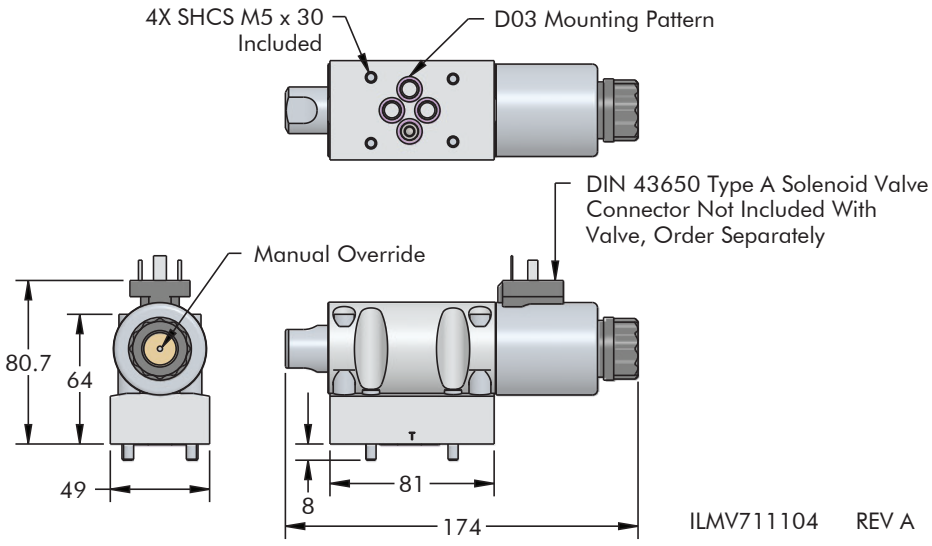

ILMV711104 REV A

© Vektek December 2021