
NEW


Solenoid Control Valves 4-Port, 3-Position

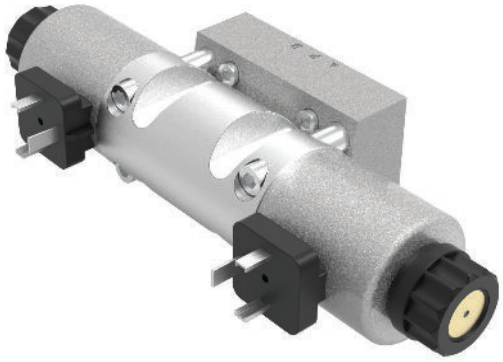

- Provide improved control of clamping circuits with true poppet design.
- Internal design promotes improved service life.
- Narrow width allows mounting of multiple valves on standard D03 manifolds.
- All valves have built-in P-Check for fail safe multi-valve operation.
- Seals and Coils can be easily replaced.
- Max Flow Rate is 25 lpm.
- Max Pressure is 400 bar.

Solenoid Control Valves: 4-Port, 3-Position					
Model No.	Valve Function	Valve Connector Part No.	Solenoid Voltage	Power Usage (Watts)	Duty Rating
41-1123-26	Closed Center	85-5342-91	24 VDC	30	100%
41-1123-46	P-Blocked Center				

* Supplied with rectified connectors that must be used to insure proper valve function. Use of any other connector will void the valve warranty.

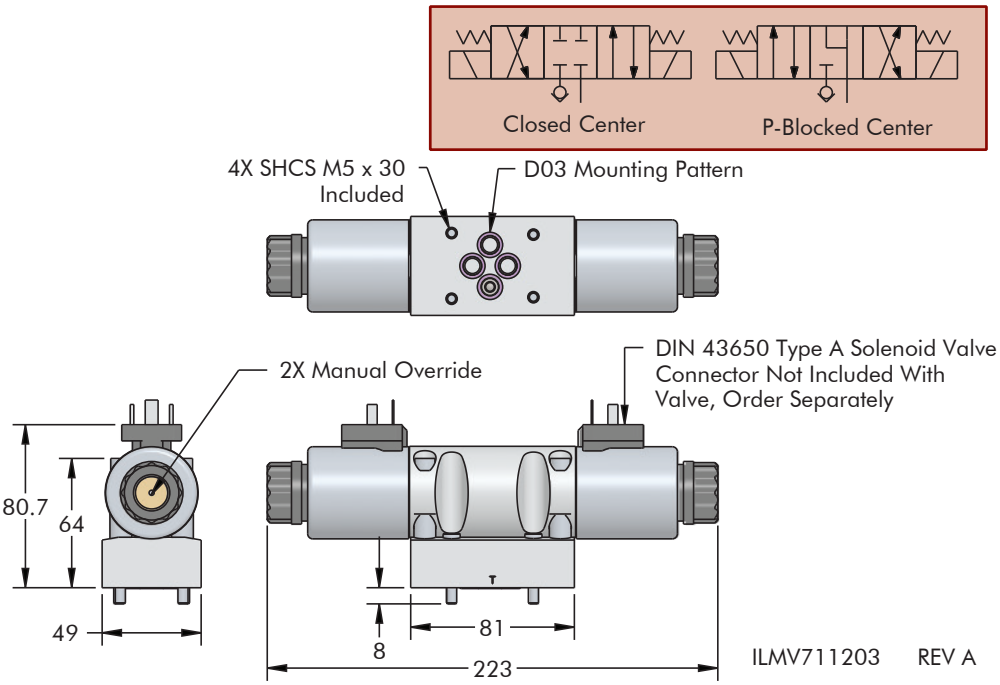

© Vektek December 2021